


GREEN GLUE DAMPING COMPOUND

SOUNDPROOFING FOR WALLS, CEILINGS & FLOORS

SUPERIOR SOUNDPROOFING AT LOW FREQUENCIES

CAN BE USED OVER EXISTING WALLS AND CEILINGS

FAST EASY APPLICATION WITH LESS WASTE

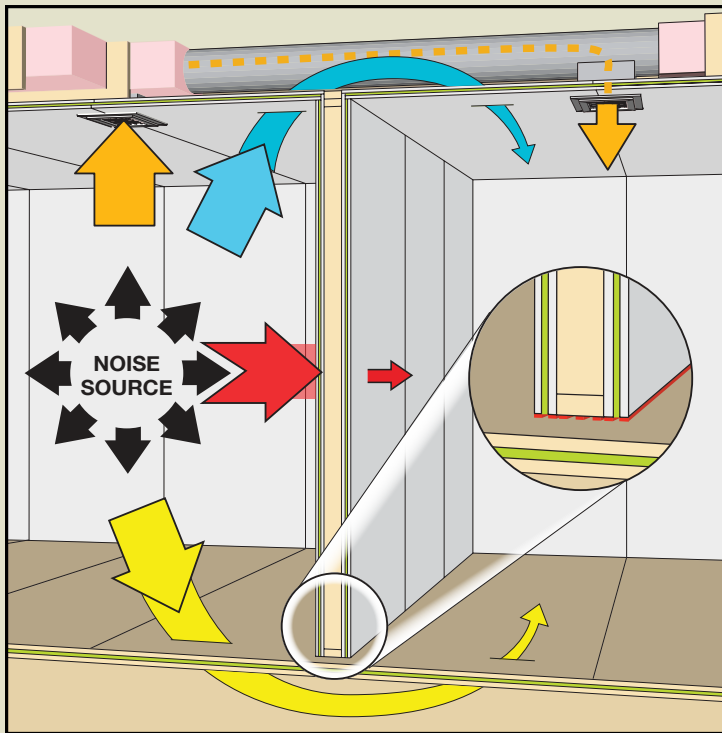

■ Green Glue ■ SilenSeal Acoustical Caulk

Sound can reach the next room through several different pathways. Using Green Glue on walls, floors and ceilings greatly reduces this flanking noise. The damping provided by Green Glue will overcome almost every potential problem.

Green Glue is your soundproofing solution for walls, ceilings and floors

Simple and Fast Application

- ▶ No measuring or troweling
- ▶ Use between two sheets of standard drywall or plywood
- ▶ The ONLY product actually designed for use over existing walls and ceilings.
- ▶ Used 1000's of times for high performance walls, ceilings and floors.
- ▶ Reliable performance; Green Glue virtually eliminates any short circuits

Green Glue Notably Outperforms

- ▶ Quiet Sheetrock
- ▶ Soundboard
- ▶ Resilient Channel
- ▶ Double Drywall and Insulation

Solve your noise problem. Call now to get it right the first time 888-666-5090

With Sound Isolation Company you will get the help you need: expert design, product selection and installation instruction. We have the experience you need for a partnership that will work.

SOUND [ISOLATION] COMPANY


2900 WESTINGHOUSE BLVD. SUITE 106
CHARLOTTE, NC 28273
704 / 504 / 1127 PH
704 / 504 / 1115 FX
888 / 666 / 5090 TOLL FREE
WWW.SOUNDISOLATIONCOMPANY.COM

www.soundisolationcompany.com



Green Glue provides higher performance with reliable results


- ▶ **Easy Application:** One tube of Green Glue will dispense in 15 seconds using a standard quart size caulking gun.
- ▶ **Fast Installation:** Apply Green Glue in a random pattern; it is not necessary to have complete coverage to obtain excellent results.
- ▶ **Cost Savings:** No more wasting or piecing together expensive specialty soundproofing materials. Cut your drywall to the size you need and apply Green Glue.

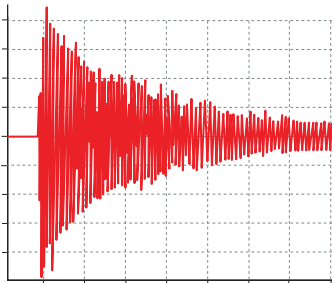

Raw Drywall Assembly

Less Vibration, Less Noise

As airborne sound waves hit a wall, ceiling or floor, the energy it carries is actually vibration. This vibration energy travels through the assembly and into adjoining rooms where you hear it as sound. Green Glue works by converting the vibration energy traveling through the assembly into heat energy, this uses up the energy quickly. The greater the decrease in vibrational energy, the less sound you will be able to hear in the surrounding rooms.

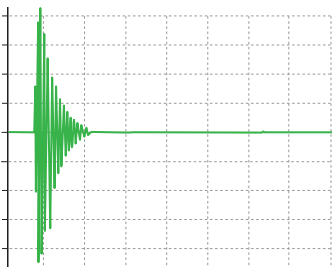


Green Glue Assembly

The adjacent charts clearly demonstrate the faster rate of vibration decay when Green Glue is used, compared to a wall when it is not used. By installing Green Glue in your wall, floor or ceiling, you will be able to create superior sound isolated, and quieter, rooms.

How quiet is your wall?

Below shows how much sound a wall will block or dissipate.

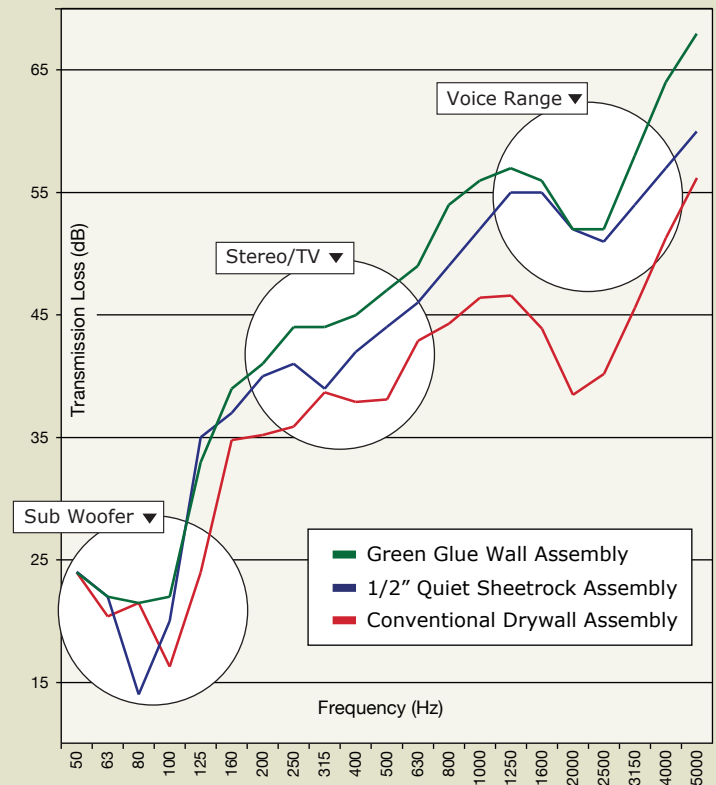

Sometimes you actually DON'T get what you paid for. See below cost analysis.

Material	Source Side, Framing, Receiving Side	STC	Cost
Green Glue	5/8" Drywall + 2 tubes GG + 5/8" Drywall, 2x4 wood studs 24" OC + R13 Fiberglass 5/8" Drywall	52	\$1.99 sqft
1/2" Quiet Sheetrock	1/2" Quiet Sheetrock, 2x4 wood studs 24" OC + R13 Fiberglass 5/8" Drywall	49	\$2.85 sqft
Soundboard	5/8" Drywall + 1/2" Soundboard, 2x4 wood studs 24" OC + R13 Fiberglass 1/2" Soundboard + 5/8" Drywall	46	\$2.10 sqft
Resilient Channel	5/8" Drywall + RC-1 Resilient Channel, 2x4 wood studs 24" OC + 3" Mineral Fiber 5/8" Drywall	43	\$2.00 sqft
Conventional	5/8" Drywall + 5/8" Drywall, 2x4 wood studs 24" OC + R13 Fiberglass 5/8" Drywall	42	\$1.05 sqft

Suggested Coverage

Good: 2 tubes per 32 sqft sheet = 192 sqft per case

Great: 3 tubes per 32 sqft sheet = 128 sqft per case

SOUNDPROOFING ACCESSORIES

Sealtight Putty Pads

SilenSeal Acoustical Caulk


GREEN GLUE 5 GALLON PAILS

SOUNDPROOFING FOR WALLS, CEILINGS & FLOORS

ONE SOUNDPROOFING PRODUCT FOR ALL APPLICATIONS

EASY PAIL INSTALLATION FOR LARGER PROJECTS

THE ONLY PRODUCT MADE FOR EXISTING
WALLS, FLOORS, AND CEILINGS

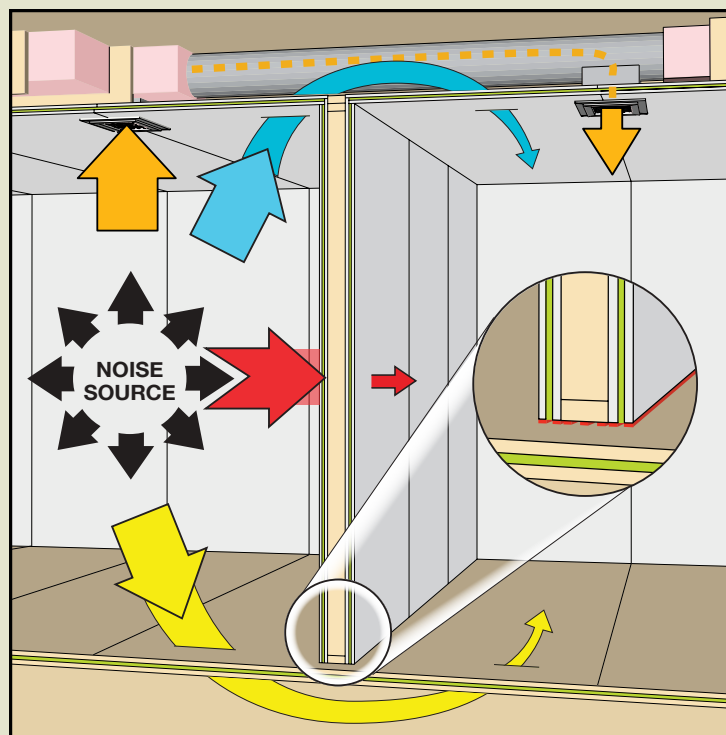

— Green Glue — SilenSeal Acoustical Caulk

Sound can reach the next room through several different pathways. Using Green Glue on walls, floors and ceilings greatly reduces this flanking noise. The damping provided by Green Glue will overcome almost every potential problem.

Green Glue Pails. Soundproofing Solution for Your Walls, Ceilings and Floors.

Green Glue in pails is perfect for larger jobs; less trash, cost savings, and easy installation with fewer men.

Using Green Glue in 5 gallon pails can be a big benefit for larger projects. Each pail covers 11 sheets (352 sqft) of 4x8 drywall or plywood. The cost of Green Glue in pails is lower than in tubes, saving money on your project. With our simple to use installation gun and follower plate, you can cut waste, save time, provide a simple soundproofing solution, and leave with a happy customer.

The damping properties of Green Glue have been shown to eliminate flanking paths, resulting in a better result than alternative methods. Green Glue is the only soundproofing product that is actually designed to work over existing walls, floors and ceilings; before selecting another product ask for testing that shows results with doubly layers of sub floor or drywall. Green Glue has been tested in more walls than any other product.

Green Glue is the right choice for your soundproofing project.

- ▶ Works with off the shelf drywall or plywood available anywhere.
- ▶ Requires no special tools, doesn't complicate your project. Your trades already know how to hang drywall and install plywood.
- ▶ Ready to ship or be picked up today from 11 locations across the US.

Solve your noise problem. Call now to get it right the first time 888-666-5090

SOUND [ISOLATION] COMPANY

2900 WESTINGHOUSE BLVD. SUITE 106
CHARLOTTE, NC 28273
704 / 504 / 1127 PH
704 / 504 / 1115 FX
888 / 666 / 5090 TOLL FREE
WWW.SOUNDISOLATIONCOMPANY.COM

*Please don't use GG in direct contact with solid finished wood products

www.soundisolationcompany.com


BULK GREEN GLUE PAIL INSTALLATION GUIDE

IT IS RECOMMENDED TO USE OUR RE-LOADABLE GUN AND FOLLOWER PLATE. THIS WILL SAVE TIME, PRODUCT AND MONEY.

OPTION: Use a 3/8" notched trowel, apply in a random pattern. Full coverage is not recommended.

Green Glue will be applied to second layer of drywall, flat on the ground. Green Glue will be installed over first layer of subfloor, before second layer is installed. STAGGER ALL SEAMS.

- 1** Remove gun from box, operate plunger several times to verify it is working correctly. Cut 3/8" opening in tip.
- 2** Remove top from pail, gently set follower plate on open pail with Gasket and hole facing up.
- 3** DO NOT PUT TIP ON GUN; with plunger almost fully depressed gently push open tube onto gasketed opening until sealed.
- 4** Gently push down on plate with gun and pull up on plunger until the tube is full. By using proper pressure you should not see leaks where follower plate meet the pail walls.
- 5** Twist on tip and apply Green Glue in a completely random pattern; for drywall leave a perimeter gap to avoid wetting hands during installation.

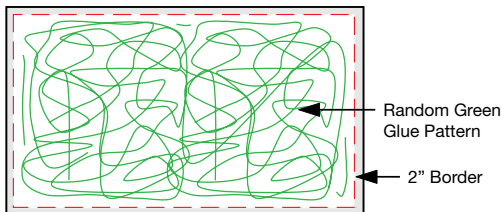

- 6** Repeat steps 1-5 until pail is empty, remove follower plate and go to next bucket.

CLEAN UP: Clean up any excess Green Glue with soap and water, immediately clean gun. spray inside tube, and working parts with WD-40, operate plunger and store in a dry clean location.

When sealing partially used pails for Green Glue it is suggested to use clear poly sheeting over bucket and then apply top to completely seal the pail.



DISCLAIMER: These application notes represent generally accepted procedures for successful installation. Sound Isolation Company reserves the right to alter these suggestions and encourages contact with the factory or its representatives to review any possible modification to these application notes prior to commencing installation.